

BT0406 SPECIFICATIONS

halo·1 blu-stone™ freestanding bathtub

FEATURES:

- Freestanding, blu-stone™ bathtub
- Streamlined, high profile one piece design
- 63" (1600mm) L x 30" (760mm) W x 21 3/4" (550mm) H
- Includes integral slot overflow & matching blu-stone™ waste cover
- Made of blu-stone™ providing the look and feel of natural stone
- Stronger and more durable than acrylic
- Non-porous, stain resistant surface that does not require sealing
- Does not promote bacteria, mold or fungi
- Varying slopes allow bather to sit upright or extend back
- Tailpiece not included (Blu recommends BTWaste.RN or BTWaste.CI.RN)

SPECIFICATIONS:

Basin Area:	41 3/4" (1058mm) x 19 1/4" (492mm)*
Top Area:	61" (1550mm) x 28" (710mm)*
To Overflow:	3 1/4" (80mm)*
Water Depth:	14" (356mm)
Slope of Backrest:	65°/52°*
Capacity:	55G (210L)*
Weight:	309lbs (140kg)*
Hot water supply req'd:	Should be 70% of water capacity of tub or greater
Warranty:	Five Year Warranty (Residential use) One Year Warranty (Commercial use)
Material:	blu-stone™
Shipping Weight:	441lbs (200kg)*
Shipping Dimensions:	(LWH) 65 3/4" x 32 3/4" x 22 3/4" (1670mm x 830mm x 580mm)*

COLORS/FINISHES:

White Matte as standard
Gloss and embossed finishes & custom colors available (Tier 1/ Custom)

ACCESSORIES (sold separately):




- BTWaste.RN or BTWaste.CI.RN Island tub drain for easy installation

INSTALLATION NOTES:

Install this product according to the installation guide. Floor support under bath must provide for a minimum of 1600 lbs (725kg). Installation will vary. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations

CODES / STANDARDS APPLICABLE:

- Meets or exceeds ANSI / ASME standard
CSA B45.5.11 / IAPMO Z124
- IAPMO / ANSI Z124.8
- CSA

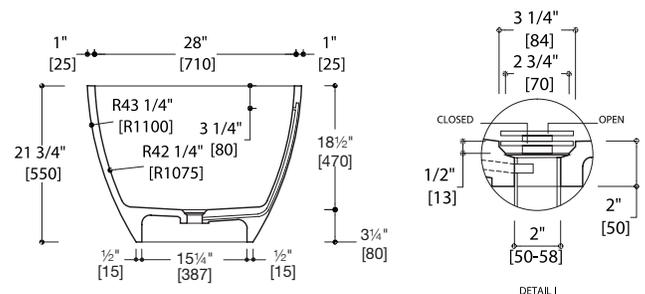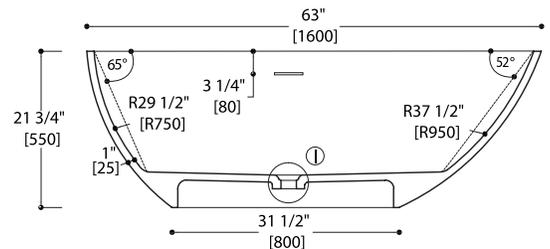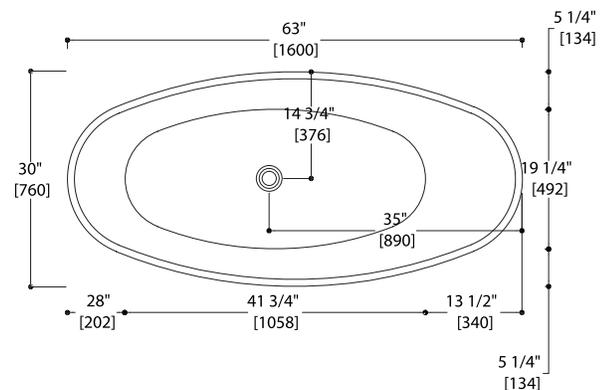

*Approximate measurements for comparison only.
Note: These dimensions and specifications are subject to change without notice.