



blu·stone™ integrated basins

Installation Guide


SA0600




SA1400
SA1410

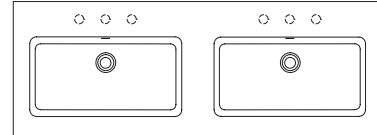


SA0700




SA1401
SA1411

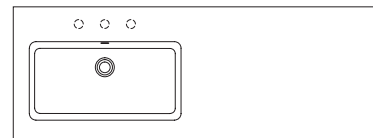


SA0900
SA0910




SA1402
SA1412

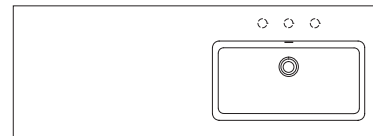

SA1200
SA1210



SA1800
SA1810

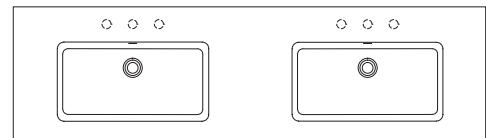

Attention — Before Installation

- We recommend that the installation be done by a minimum of 2 people as a security precaution. Also make sure to adopt the proper posture when lifting the basin.
- Adhere to all local building and plumbing codes. The diagrams in this guide are not construction plans. They are visual aids.
- For best results, the floor must be level and the wall must be square with the floor.

Installation Requirements

Please read the instructions carefully so as to avoid any damage to the fixture.

1. To ensure this product is installed properly, you must read and follow these guidelines.
2. The owner/user of the product must keep this information for future reference.
3. Consult local building codes to make sure the installation complies with standards.
4. Remove the unit from its packaging. Before disposing of it, inspect the unit to make sure its in good shape. Should inspection reveal any damage or defect in the finish, contact your distributor. The warranty does not cover damages or defects in the finish once it has been installed. Blu Bathworks' responsibility for shipping damages ceases upon delivery of the product in good order to the carrier. All complaints regarding damage due to transport must be made directly to the carrier.
5. Place the unit in the bathroom before you start working. Conserve all nuts and bolts.
6. To protect the unit during installation, we recommend that you lay a piece of cardboard on the bottom.
7. If the unit is covered with polyethylene protective film, do not remove until installation is complete to grant maximum protection. However, remove film where any two surfaces will be in permanent contact.
8. Verify that all dimensions on the plan are the same as the ones of the unit.

Installation Notes

Important! Install this product according to the installation guide. Product does have an overflow. Spout must provide a minimum of 5" reach for adequate clearance into basin. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations.

Technical Support Assistance

If further assistance is required, please contact:

Product Support at 1.866.907.0122 (09:00 – 17:00hrs PST) or email technical@blubathworks.com

North America

Blu Bathworks Inc.

7388 Hedley Avenue, Burnaby, BC, Canada V5E 2P9

T +1.604.299.0122 F +1.604.299.0125

Please refer to blubathworks.com for warranty, terms & conditions under warranty & procedure for warranty service.

Installation Notes


Important! Install this product according to the installation guide. Product does have an overflow. Deck mounted faucet spouts must provide a minimum of 5" reach for adequate clearance into basin, or a minimum 7½" reach for wall mounted faucet spouts. Our products must be installed by certified professionals only and according to our installation guide as well as federal, provincial / state and local building codes and regulations.

Installation for Integrated Basins

BASIN INSTALLATION

*Note: For deck mounted tapware refer to drilling instructions prior to the installation of the basin.


1. Apply a ¼" (6mm) continuous bead of silicone sealant around the top of the vanity, as illustrated.
2. Position the basin on top of the vanity.
3. Verify that the basin is level. If the basin is not level, gently press down on the basin.
4. Wipe away excess silicone sealant.
5. Allow the silicone sealant to set according to the sealant manufacturer's instructions.
6. Complete the water supply and drain connections.
7. Run water into the basin and check for leaks.

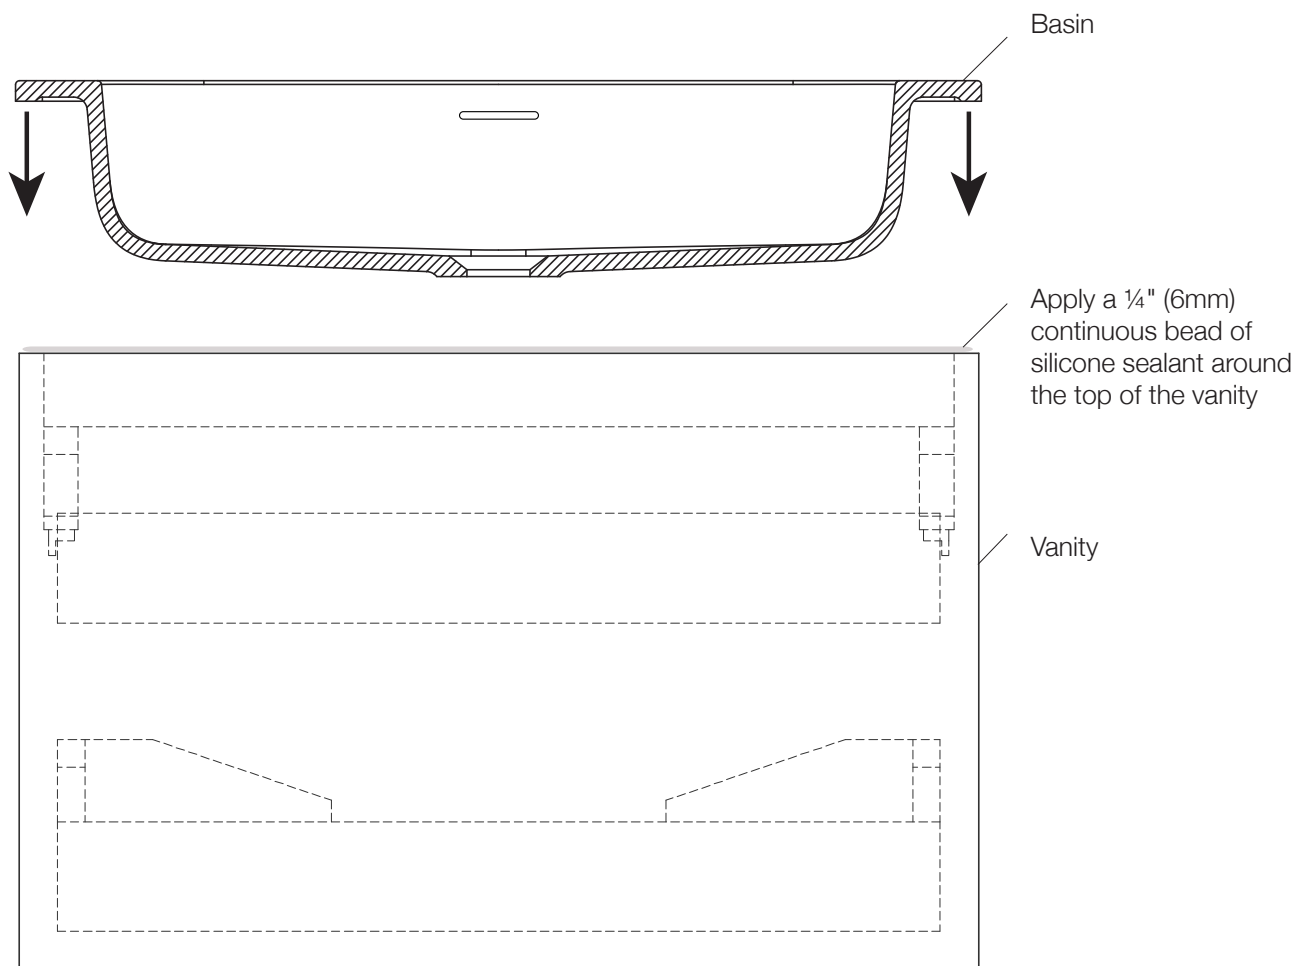

Faucet and Drain Connections (Not Supplied)

- Connect the water supply to the faucet according to faucet instructions.
- Connect and tighten the overflow system.
- Connect and tighten the trap to the drain.
- Turn ON the water supplies to the faucet.
- Purge air from the HOT & COLD water by running the water for a few seconds.
- Fill the lavatory with water.
- Check for leaks at the water supply and drain connections.

Drilling Instructions for Deck Mount Faucets



- Use a WIDIA (Cemented Carbide) cutter with the appropriate diameter according to the faucet manufacturer's installation guide.
- Start drilling from the underside of the basin.
- Applying light pressure, drill and stop when the center drill has completely penetrated the basin.
- Remove the cutter and flip the basin over.
- Place the cutter into the guide hole.
- Applying light pressure, finish drilling the required hole.

Cutting instructions for custom length fittings

1. Mark the Basin to indicate the position of the cut with a straight edge and a pencil according to the required length.
2. Cut through the cut-out line. A standard household skill saw needs to be upgraded with a continuous diamond cutting blade. These are available at major home improvement centres. To avoid chipping the edge of the stone, which is caused by the blade's vibration, collars that act as big washers on both sides of the saw's blade reduce the vibration, allowing a cleaner cut. When stone is cut dry, a considerable amount of dust is generated. Some installers will use a handheld diamond-bladed radial saw with a vacuum attachment to help minimize the mess.
3. Place the basin into position.
4. Note: Ensure the cut edge is installed against the wall to ensure the smooth edges are exposed.